

Firebus with Flasher Hooter

MODEL: SA-1Z-FH

Firebus is unique design by ASES. The system having a conventional zone line, inbuilt MCP & inbuilt hooter with strobe. The single zone line can handle 8-10 NOS conventional detectors. This model is best suited for small shops, garages, small restaurants.

Technical Specification:

- **Inbuilt MCB & Hooter with single zone Fire alarm Panel.**
- **Battery Charger & Battery backup facility.**
- **Best usage for shops, showrooms, factories, houses, temporary locations, schools.**
- **Small size, light weight, cylindrical shape.**
- **Compatible with up to 8–10 smoke detector (any make)**
- **System off, system normal, system silence facility.**
- **System healthy, fire, A.C. fail indications.**
- **External Hooter & M.C.B connectivity Facility.**
- **Inbuilt hooter with/without strobe optional.**


Technical Specification:

Panel Operating Condition Operating Voltage

AC Power	220V ac, 50Hz ± 10%
Stand by Power	12V dc
Housing Color	Red Body
No. of Zones	Single Zone
End of Line	4K 7Ω
Power consumption	10 watt/200 Watt (Normal/Fire)
Weight (without Batt.)	3 Kg
Dimensions	10" x 4" x 2.5"
Detection o/p	12V dc
Hooter o/p	12V dc



Mechanical Specification:

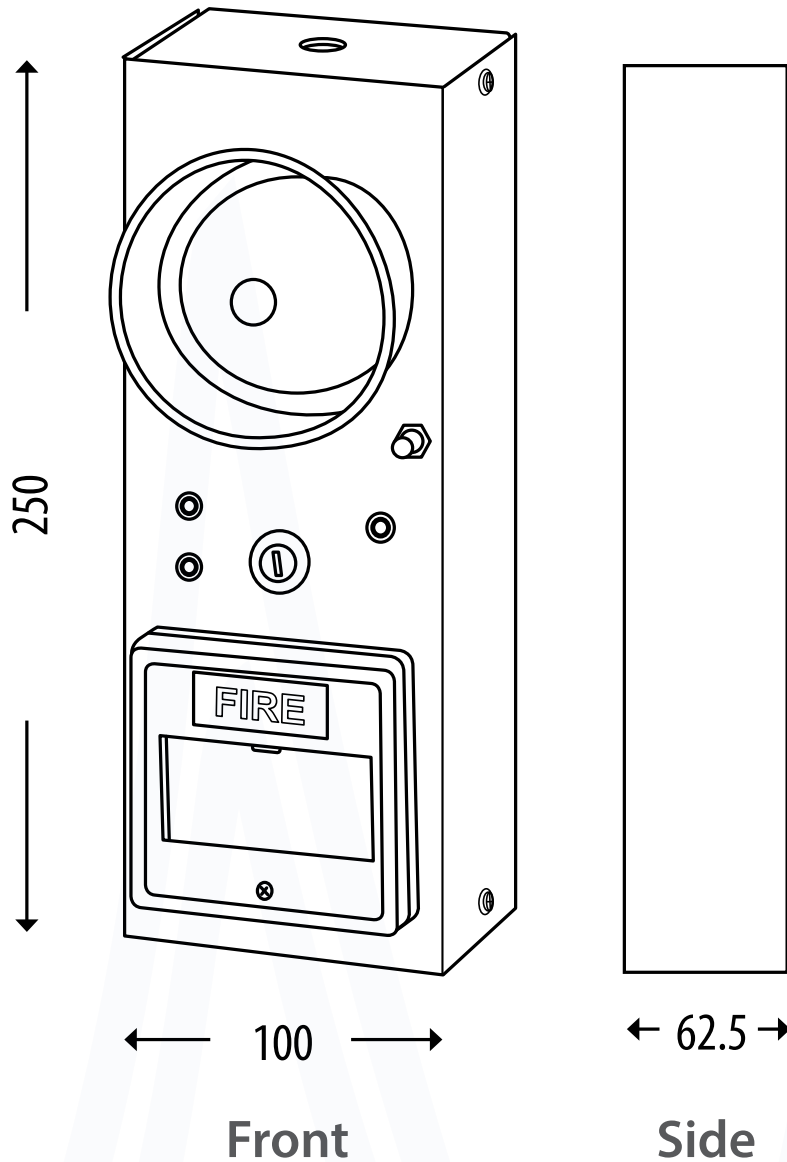

Ordering Information:

Part Number	Pack Quantity	Dimensions (WxHxD millimetres)	Weight
SA-1Z-FH	1 NOS	130 x 320 x 120	3 Kg