


Flexyle Sheet - Signages

Description

Flexyle photoluminescent based Glow-in-the-dark sheeting with luminous properties enclosed in a weatherproof UV stabilized film. With UV screen printing by imported inks.

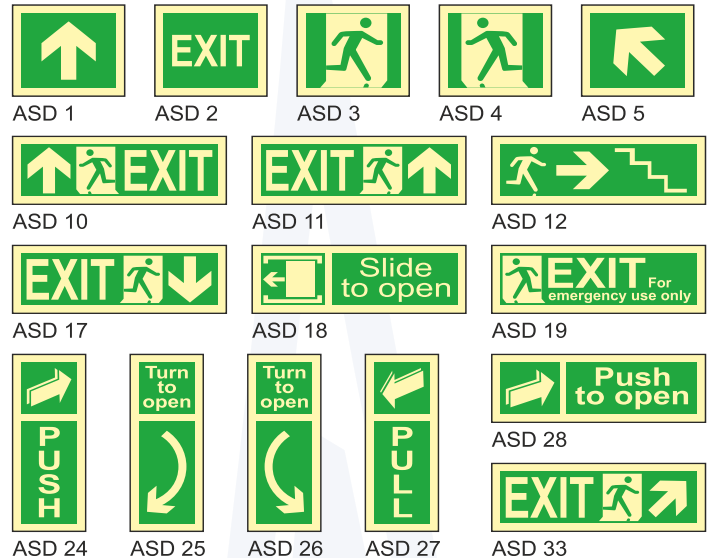

Thickness : 0.2 MM ($\pm 10\%$)

Service Temp. : -20 to $\pm 80^{\circ}\text{C}$

Application : Suitable for INDOOR use only.

Surface Colour : Greenish Yellow

Visibility : Glow visible upto > 8 to 10 hours in total darkness.

Properties :

- Fugistatic.
- Non-toxic.
- Non-radioactive.
- Contains no lead or Phosphoris.
- No health or environmental problem.
- Simple to install & easy to maintain can be screwed or just peel off to stick.

Life : Life > 20-30 Year for Best working-INDOOR