




# Hinges

## Hinges



Available Finishes	Available Steel Grades
<ul style="list-style-type: none"> <li>• SS Satin</li> <li>• SS Polished</li> <li>• Special Black</li> <li>• PVD</li> <li>• Electroplated</li> </ul>	<ul style="list-style-type: none"> <li>• SS 316</li> <li>• SS 304</li> <li>• SS 201</li> <li>• Mild Steel</li> </ul>

Features
<ul style="list-style-type: none"> <li>• For Timber Door, Supplied with 8 Screws : 32 x 10 CSK Phillips Head</li> <li>• For Metal Door, Supplied with 8 Screws : M6 x 16 CSK Phillips Head</li> <li>• Corners : Square/Round</li> <li>• Maximum Weight : 120 kg (For 3 Hinges)</li> <li>• Also available with Security stud Feature (DOG BOLT)</li> <li>• 3 H Fire Rated</li> </ul>

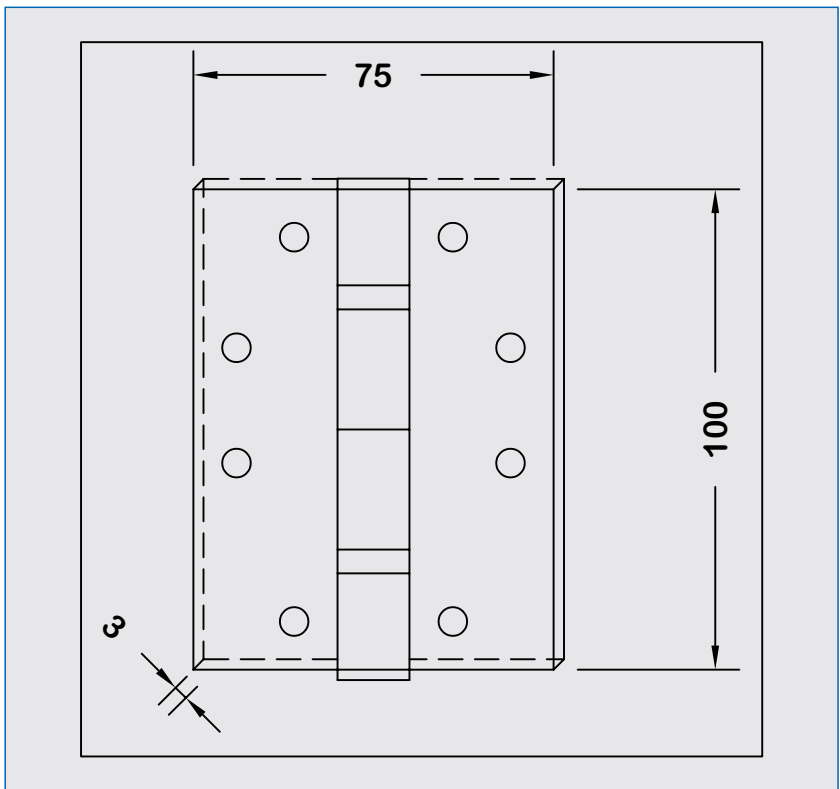



## Hinges

UL Product iQ®

UL Solutions

### GWZQ.R40914 - Door Hinges

#### Door Hinges

R40914

**Ases Security Pvt Ltd**

A - 2/69,Site IV,Sahibabad

Industrial Area

Ghaziabad, Uttar Pradesh 201010 India

**Hinge**, Models ASESHG-2BB403030, ASESHG-2BB403530, ASESHG-2BB404030, ASESHG-2BB454030, ASESHG-2BB454034, ASESHG-2BB454530, ASESHG-2BB454534, ASESHG-2BB503030, ASESHG-2BB503530, ASESHG-2BB504030, ASESHG-2BB403030R, ASESHG-2BB403530R, ASESHG-2BB404030R, ASESHG-2BB454030R, ASESHG-2BB454034R, ASESHG-2BB454530R, ASESHG-2BB454534R, ASESHG-2BB503030R, ASESHG-2BB503530R, ASESHG-2BB504030R for use on swinging-type fire doors, rated. Investigated to ANSI/BHMA A156.1.

Also evaluated in accordance with Standard UL 10C

Last Updated on 2022-10-18



The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL Solutions' Follow - Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL Solutions' Follow - Up Service. Always look for the Mark on the product.

UL Solutions permits the reproduction of the material contained in Product iQ subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from Product iQ with permission from UL Solutions" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "©2022 UL LLC."

