

Conventional Repeater Panel

MODEL: 16/32 Z


Features:

- RS 485 repeater for main panels
- Only 4 wire needed to repeater up to 96 Zone.
- Fire & Fault contacts available
- LED indications for alarm & fault
- No separate wiring required
- Small in size
- Zone wise repeating.
- Compatible with all ASES- 485 networking panel
- 16 x 2 line display to show the status of main panels



Technical Specification:

Power I/P	24 V DC
Housing Colour	Red / White
No. of Zone	Customised
Hooter o/p Supply	Typical 24 V DC (optional)
Power Consumption	30 Watt @ 24 VDC (normal condition)
Dimensions	16.5"x14"x5"
Weight (without Batt)	4 Kg.
End of line	NA
Detection o/p Supply	NA

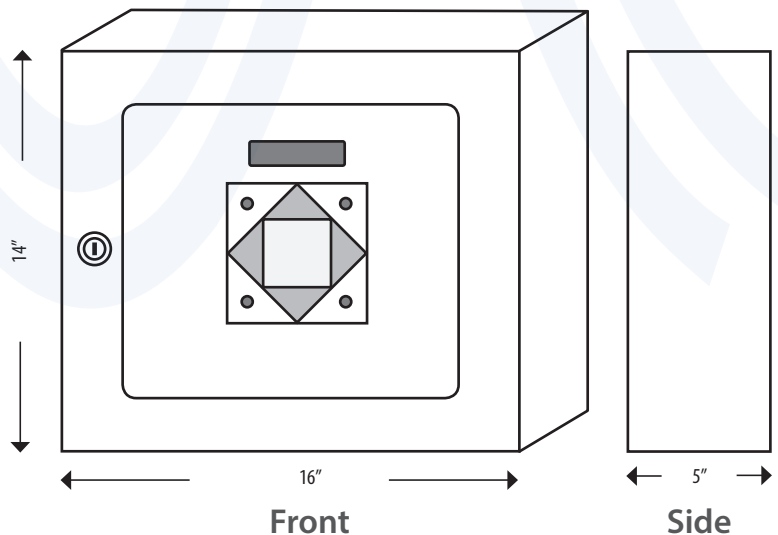

RP - 16 / 32 Z