



## Fire Rated Doors

C.B.R.I (Roorkee) Tested as per  
BS : 476 & IS : 3614 for 2 hours.

### Fire Rated Metal Door


60/120 Minutes



#### Description:

48 mm thick Metal Fire Door of 60/120 minutes Fire rating confirming to BS : 476 Part-22 and IS : 3614 Part-II Fabricated with 2 nos 18SWG galvenised steel sheet sandwiching with proprietary fire resistant insulation materials in-between. The door frames are manufactured from 16SWG galvenised steel sheet pressed form to double rebate profile of size 143mm x 60mm. The door frame and door shutter are fitted with SS BALL BEARING HINGES' and are coated with one coat of fire and corrosion resistant primer.



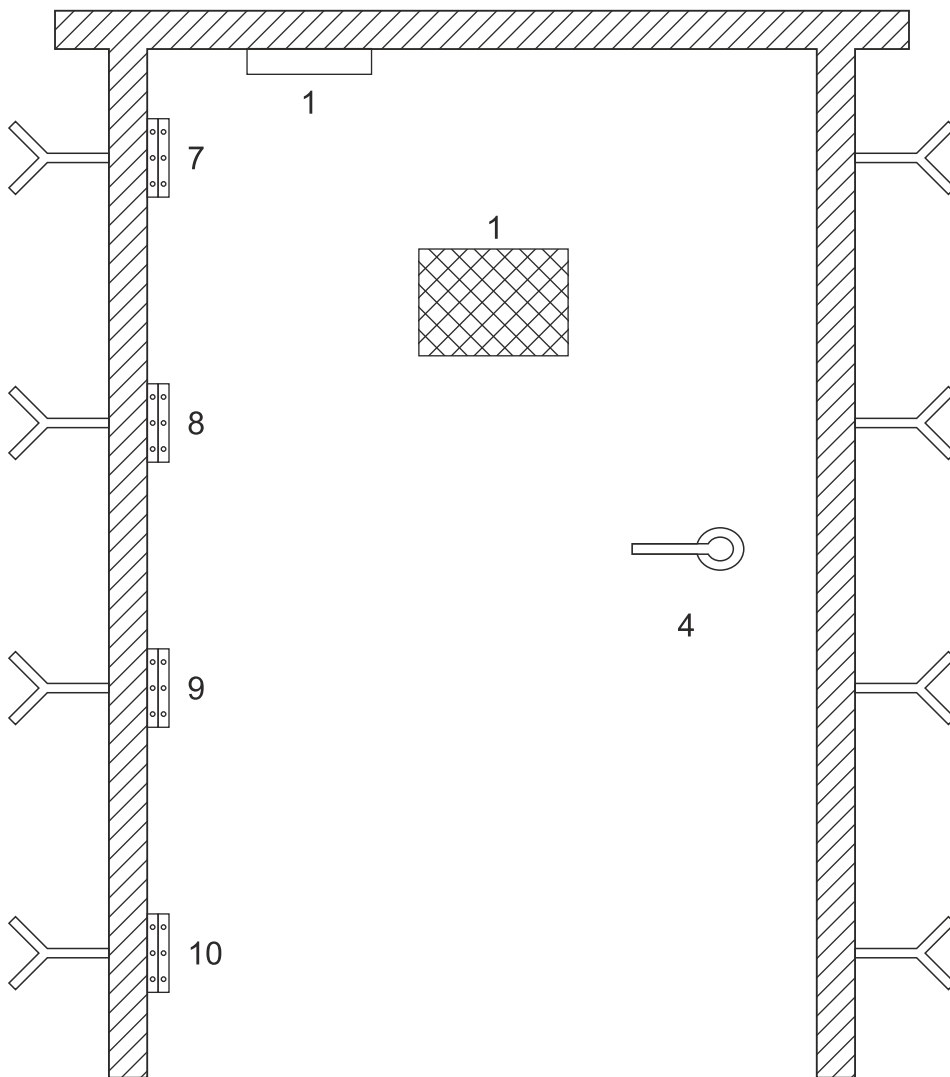

Note :

- 1 – Door Closer
- 3 – Vision Panel
- 4 – Handle
- 7, 8, 9, 10 – Hinges